



THIS THERMOSTAT IS SUITABLE FOR WATER HEATING, ELECTRIC HEATING AND GAS BOILER

Product packaging

- Thermostat host-----1 PC
- Qualification certificate-----1 PC
- Sensing line (optional)-----1 PC
- Manual-----1 PC
- Screw-----2 PCS

Product Model

- WP Plumbing 3A
- EP Electric Heating 16A
- WPB linkage, gas boiler 3A

Installation procedure

This product is installed with a standard 86 control switch (in compliance with European regulations)

-
1. Turn the fixator so that the arrow is aligned with the display screen. Remove the mounting plate
 2. Remove the mounting plate in this direction
 3. Fix the mounting plate on the cassette with a screw
 4. Insert the thermostat into the mounting plate from top to bottom and reuse ,The screwdriver will rotate the fixator 180 degrees to complete the installation.

Welcome

Thank you for your trust and support. By adopting higher-end technology and more perfect technology, your new thermostat will provide you with the right temperature environment every day in the future, making your life more comfortable and your living environment more stylish and beautiful. For detailed instructions on the installation and use of this thermostat, please read this manual carefully. Please contact a professional to install the thermostat for you and install and use the product to the extent permitted by law

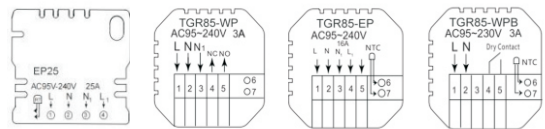
Application

Intelligent digital temperature controller is a floor heating system suitable for room temperature control and household temperature control. It controls the operating state of the floor heating equipment by comparing the ambient temperature with the set temperature, which improves comfort and achieves energy saving. This digital temperature controller adopts microcomputer control technology and is equipped with full-screen display touch buttons, which is elegant in design and easy to use. The thermostat has manual automatic, programmable and state memory functions.

User Notes

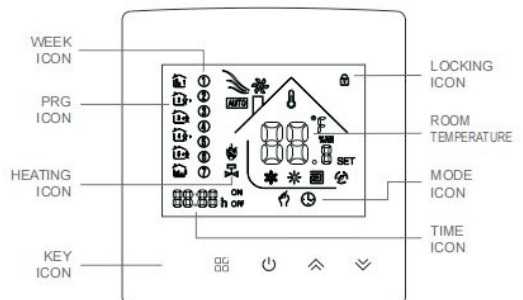
1. Please read this manual carefully. Improper operation may damage the product or cause dangerous conditions.
 2. The installation personnel must be well-trained and experienced service technicians.
 3. After installation, please read this manual carefully and operate the product according to the instructions.
- Caution: Risk of electric shock or equipment damage.

Wiring Diagram














Note: WP for water heating; EP for electric heating; WPB for gas boiler






Description of display & Icon

















Operating Instruction



1. Power on/off: press  to turn on/off the thermostat.
2. Press the  key to switch between manual and automatic modes.
3. In the automatic mode, press  or  to adjust the temperature to enter the automatic temporary mode. This mode runs for only one session.
4. Long press  key and  key to enter the clock setting, press  key to switch Settings Item, press  and  keys to adjust the value of each parameter.
5. Press  and  for 5 seconds to add or cancel the child lock.





Time programming instructions

Press and hold the  key to enter the programming setting, short press the  key to switch the option, press the  key or  key to adjust each option parameter, and press the  key to exit and save.

KEY	OPTION	ICON	TIME	ADJUST	DEFAULT	ADJUST
 	workday	1 	06:00		20°C	
		2 	08:00		15°C	
		3 	11:30		15°C	
		4 	12:30		15°C	
		5 	17:00		22°C	
	Holiday	6 	22:00		15°C	
	Holiday	1 	08:00		22°C	
		2 	23:00		15°C	

Advanced options

When POWER OFF, press the  key and the  key for 5 seconds to enter the advanced option setting.

Press  to enter the next option, press  and  to adjust, and press  to exit the height Level option.

1	Temperature compensation	The default value of the calibration room temperature is -2°C. Press the up and down keys to adjust. The adjustable range is 9.9°C to -9.9°C.
2	Sensor selection	The temperature sensor is selected as IN by default. Press the up and down keys to adjust as IN respectively, indicating that the internal.
3	Modify the temperature limit	The default temperature limit value is 35°C. Press the up and down keys to adjust the range from 5°C to 60°C.
4	Temperature difference start	The default temperature difference is set to 1 °C. Press the up and down keys to adjust the range to 1-10 degrees.
5	Antifreeze function	Set the default anti-freeze function to OFF, display OFF, press the up key to turn on anti-freeze and display ON
6	Holiday option and turn off weekly programming	Set the default rest day as double OFF. Press the up and down keys to adjust it to double OFF (1-5), single OFF (1-6), no OFF (1-7) and turn off week programming (OFF).
7	Primary and secondary reverse selection	Set the default main and auxiliary reversal to 0. Press the up and down keys to adjust 0 to turn off the main and auxiliary reversal. 01 means auxiliary reverse, 02 means auxiliary reverse, 03 means main and auxiliary reverse, shutdown and antifreeze is not on, stop output
8	Passive linkage output delay time	Set the default passive linkage delay time to 0. Press the up and down keys to adjust the range of 0-5 minutes.
9	Set upper temperature limit	The default value of the set temperature upper limit is 60°C, and the adjustment range is 35-95°C by pressing the up and down keys.
10	Restore Factory Defaults	Set to restore the factory default setting to display. Press the up button to adjust the display, press the enter button to restore the factory settings.